




## PASS & SEYMOUR® Hospital Grade Self-Test GFCIs 15 & 20A, 125VAC

1597HG, 2097HG, 1597HGNTLTR, 2097HGNTLTR,  
1597HGTR, 2097HGTR, 1597IGHGTR, 2097IGHGTR,  
1597HGTRA, 2097HGTRA, 2097HGNA, 207HGTRNA

### Hospital Grade Self-Test GFCIs offer superior durability and protection.

The new Pass & Seymour® Hospital Grade Self-Test GFCI receptacle with SafeLock® Protection conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.

For non-Hospital Grade, refer to SF1101R6.

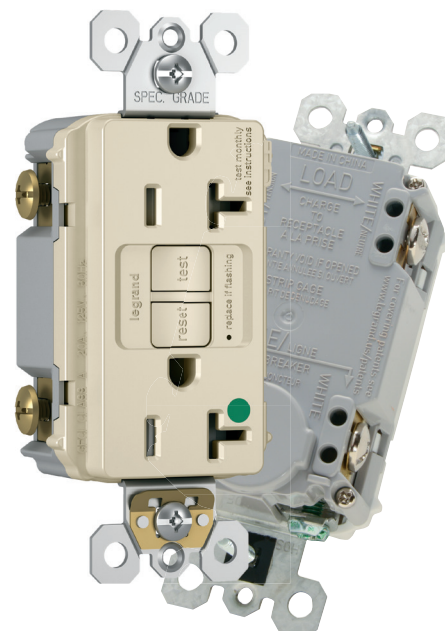

### FEATURES & BENEFITS


**Patented SafeLock® Protection**  
if critical components are damaged and ground fault protection is lost, power to the receptacle is disconnected.

**Tamper-resistant automatic shutter system** prevents young children from inserting common household objects.

**The indicator light flashes** if the device fails the self-test, signalling that the GFCI should be replaced.

**Side or internal screw-pressure-plate back wire termination** with #14 – #10 AWG stranded or solid, copper or copper-clad conductors.

**Captive screws** make for easier installation.

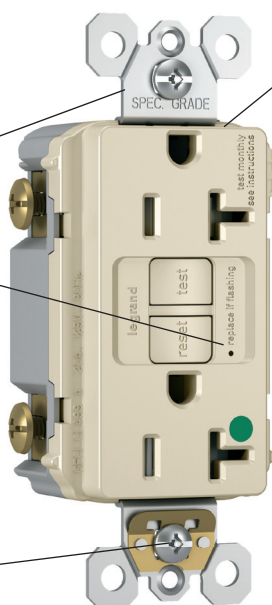

**Ground terminal clamp** allows for fast installation.

**Two back-wire holes per termination** add wiring flexibility, eliminate pigtail and save box space.

**Prevents line-load reversal miswire:**  
No power to the face or downstream receptacles if wired incorrectly.

**High-impact-resistant, thermoplastic construction** for superior strength and durability.

**Thinner profile** speeds installation by leaving more room for wires in the box.

**Auto-ground clip** assures a positive ground to metal box.

**The most durable GFCI available.**  
Exceeds UL943 voltage surge requirements.

Meets 2015 UL Requirements

2097HGTRLA

### FIELD USES/VERTICAL MARKETS

- |              |              |                       |                     |
|--------------|--------------|-----------------------|---------------------|
| ■ Industrial | ■ Healthcare | ■ Education           | ■ Institutional     |
| ■ Retail     | ■ Office     | ■ Hospitality/Lodging | ■ Multiple Dwelling |

SF708R5 — Updated December 2015 — For latest specs visit [www.legrand.us/passandseymour](http://www.legrand.us/passandseymour)



## PASS & SEYMOUR®

### Hospital Grade Self-Test GFCIs 15 & 20A, 125VAC

#### ORDERING INFORMATION

| Catalog Number                                   | Description                                                        | Ratings  | Colors                    | NEMA Config. |
|--------------------------------------------------|--------------------------------------------------------------------|----------|---------------------------|--------------|
| <b>Hospital Grade Self-Test GFCI Receptacles</b> |                                                                    |          |                           |              |
| 1597HGTR*                                        | Hospital Grade Tamper-Resistant Duplex GFCI                        | 15A 125V | I, W, —, GRY, BK, RED, LA | 5-15R        |
| 2097HGTR*                                        | Hospital Grade Tamper-Resistant Duplex GFCI                        | 20A 125V | I, W, —, GRY, BK, RED, LA | 5-20R        |
| 1597HG*                                          | Hospital Grade Duplex GFCI                                         | 15A 125V | I, W, GRY, BK, RED, LA    | 5-15R        |
| 2097HG*                                          | Hospital Grade Duplex GFCI                                         | 20A 125V | I, W, —, GRY, BK, RED, LA | 5-20R        |
| 1597IGHGTR*                                      | Hospital Grade Isolated Ground Tamper-Resistant Duplex GFCI        | 15A 125V | O                         | 5-15R        |
| 2097IGHGTR*                                      | Hospital Grade Isolated Ground Tamper-Resistant Duplex GFCI        | 20A 125V | I, W, GRY, RED, LA, O     | 5-20R        |
| 1597HGNTLTR*                                     | Hospital Grade Combination Tamper-Resistant Night Light/GFCI       | 15A 125V | I, W, —, RED              | 5-15R        |
| 2097HGNTLTR*                                     | Hospital Grade Combination Tamper-Resistant Night Light/GFCI       | 20A 125V | I, W, GRY, RED, LA        | 5-20R        |
| 1597HGTRA*                                       | Hospital Grade Audible Alarm Tamper-Resistant Duplex GFCI          | 15A 125V | GRY, —, LA                | 5-15R        |
| 2097HGTRA*                                       | Hospital Grade Audible Alarm Tamper-Resistant Duplex GFCI          | 20A 125V | I, W, RED, LA             | 5-20R        |
| 2097HGTRNA*                                      | NAFTA-Compliant Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI | 20A 125V | I, W, RED, LA             | 5-20R        |
| 2097HGNA*                                        | NAFTA-Compliant Hospital Grade 20 Amp Duplex GFCI                  | 20A 125V | I, W, —, GRY, RED, LA     | 5-20R        |



NEMA  
5-15R



NEMA  
5-20R

#### \*Color Designation

|   |       |     |       |     |              |    |        |
|---|-------|-----|-------|-----|--------------|----|--------|
| I | Ivory | —   | Brown | RED | Red          | BK | Black  |
| W | White | GRY | Gray  | LA  | Light Almond | O  | Orange |

For more information on these and other P&S products refer to our Catalog or visit our web site.

# PASS & SEYMOUR®

## Hospital Grade Self-Test GFCIs

### 15 & 20A, 125VAC



#### TECHNICAL SPECIFICATIONS

##### 3rd Party Compliance

cULus Listed File Number E42190, Standard UL498 Attachment Plugs and Receptacles, UL943 GFCIs. Federal Specification WC596, Hospital Grade. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

##### Performance

###### Electrical

|                         |                          |
|-------------------------|--------------------------|
| Dielectric Voltage      | Withstands 1500V minimum |
| Trip Level              | 4 to 6 mA                |
| Trip Time               | .025 Second Nominal      |
| Frequency               | 60 Hz                    |
| Maximum Working Voltage | 125VAC                   |
| Voltage Range           | 102-132VAC               |

###### Mechanical

|                         |                                                                   |
|-------------------------|-------------------------------------------------------------------|
| Terminal Identification | Terminals identified in accordance with UL498 (Hot, White, Green) |
| Terminal Accommodation  | #14 AWG – #10 AWG solid or stranded copper conductor only         |
| Product Identification  | Ratings are a permanent part of device                            |

###### Environmental

|                       |                |
|-----------------------|----------------|
| Operating Temperature | -35°C to +66°C |
| Maximum Humidity      | 95%            |
| Flammability          | UL94 V2        |

##### Material Specs


Face: Nylon  
 Body: Nylon  
 Contacts: .03" Brass (.8)  
 Mounting Straps: Galvanized Steel  
 Terminal Screws: Nickel-Plated Steel #8 - 32  
 Hex Head Grounding Screw: Steel (Green)  
 Flat Head Mounting Screws: Zinc-Plated Steel  
 Test/Reset Buttons: Nylon  
 Nightlight Lens: \*Lexan®  
 Tamper-Resistant Shutter: \*\*Thermoplastic

\* For 1597HGNTL and 2097HGNTL Nightlight versions only.

\*\* For 1597HGTR and 2097HGTR Tamper-Resistant versions only.

##### Warranty

1 Year

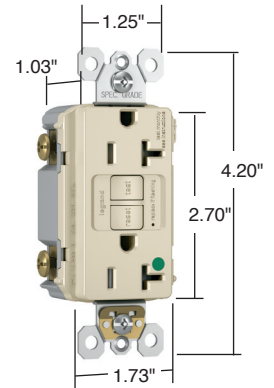

Dimensions for  
15 & 20 Amp



Nightlight/GFCI



Tamper-Resistant



Audible Alarm

#### ALSO AVAILABLE...

- |                                              |                                      |                               |                               |
|----------------------------------------------|--------------------------------------|-------------------------------|-------------------------------|
| ■ USB Charging Devices                       | ■ Ground Continuity Monitoring (GCM) | ■ Turnlok® Locking Devices    | ■ IEC 309 Industrial Products |
| ■ PlugTail® Devices                          | ■ Straight Blade Plugs & Connectors  | ■ Weatherproof Boxes & Covers | ■ Flexcor® Wire Mesh Grips    |
| ■ Surge Protective & Isolated Ground Devices |                                      |                               | ■ Night Lights                |



#### Electrical Wiring Systems

P.O. Box 4822  
Syracuse, NY 13221-4822  
Phone: 1.800.776.4035  
[www.legrand.us/passandseymour](http://www.legrand.us/passandseymour)

570 Applewood Crescent  
Vaughan, Ontario L4K 4B4  
Phone: 905.738.9195  
[www.legrand.ca](http://www.legrand.ca)